





Provides Simple and Powerful Solutions for Rapid High-Throughput Grinding

The OHAUS HT (High Throughput) Lysing Bead Mill Lab Homogenizer offers efficient solutions for grinding, lysing, pulverizing, mixing and homogenizing sample preparations. High-throughput processing is ideal for multiple sample and tube configurations. Easy-to-load tray securely locks microplates, deep well plates or tubes in place. High-speed linear motion processes samples quickly. Maximize sample preparation no matter how difficult the task.

Standard Features Include:

- For high performance grinding, the HT Lysing Homogenizer is one of the most flexible models on the market. The built-in adjustable holder allows for easy processing of samples no accessories needed.
- This versatile Homogenizer allows high throughput grinding, and is ideal for processing multiple tubes, microplates, deep-well plates, or any sample container that fits in the 10.2x12.7x6.4 cm holder.
- Take the guesswork out of sample preparation. Five preset programs optimized for speed and time to process the most common samples, including bacteria, fungi, plant, and animal tissue easily.

HT Lysing Bead Mill Homogenizer

| Model | HOHTDG |
|--------------------------------------|---|
| Speed Range | 300 to 1600 rpm (1 rpm increments) |
| Motion | Reciprocal, 31 mm |
| Timer | 1 second to 10 minutes (1 second increments) |
| Program 1 | 5 minutes @ 1500 rpm |
| Program 2 | 2 minutes @ 1500 rpm |
| Program 3 | 3 minutes @ 1300 rpm |
| Program 4 | 4 minutes @ 1500 rpm |
| Program 5 | 1 minute @ 1600 rpm |
| Capacity | 1 deep well plate, 4 microplates, or any sample matrix that can fit in the $10.2 \times 12.7 \times 6.4$ cm adjustable holder |
| Maxamim Capacity | 300 g |
| Working Environment | 5°C-40°C, 20%-85% RH, non-condensing |
| Dimensions (L \times W \times H) | 44.6 × 28.6 × 51.8 cm |
| Net Weight | 34 kg |
| Ship Weight | 44.5 kg |

Compliance


• Product Safety: EN 61010-1, EN 61010-2-051, CAN/CSA C22.2 61010-1, CAN/CSA-C22.2 61010-2-051, UL 61010-1

• Electromagnetic Compatibility: EN/IEC 61326-1, ICES-003, FCC Part 15

Accessories

| White, Bacteria, 2 mL skirted tube, DNase/RNase free, 100 μm Zirconium Beads, 100/box | 0391402 | |
|---|---------|--|
| Yellow, Yeast, 2 mL skirted tube, DNase/RNase free, 400 µm Zirconium Beads, 100/box | 0391404 | |
| Blue, Fungi, 2 mL skirted tube, DNase/RNase free, 800 μm Zirconium Beads, 100/box | 0391405 | |
| Orange, Soft Sample, 2 mL skirted tube, DNase/RNase free, 1.4 mm Zirconium Beads, 100/box | 0391406 | |
| Green, Plant, 2 mL skirted tube, DNase/RNase free, 3 mm Zirconium Beads, 100/box | 0391408 | |
| Red, Animal Tissue, 2 mL skirted tube, DNase/RNase free, 3 mm Stainless Steel Grinding Balls, 100/box | 0391409 | |
| Brown, Environmental, 2 mL skirted tube, DNase/RNase free, 100 μm /800 μm/3 mm Zirconium Beads, 100/box30391410 | | |
| Tube Rack, 25 × 2 ml Tubes, 2 per pack | 0391431 | |
| Sample Tube Kit, 14 Tubes; 2 each of White, Yellow, Blue, Orange, Green, Red, and Brown | 0391433 | |

Dimensions

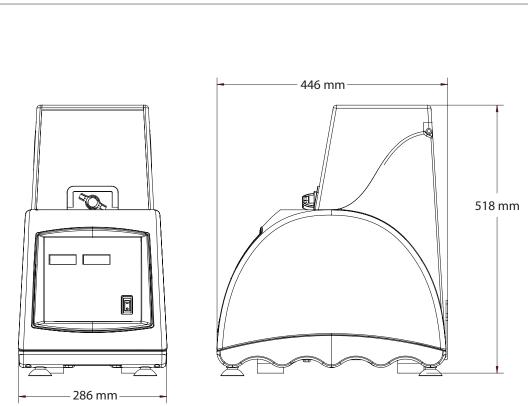

OHAUS Asia/Pacific Headquarters 6F, Block 7, 471 Guiping Road Shanghai 200233 China

e-mail:ChinaSales@ohaus.com Tel: +86 21 64855408

www.ohaus.com

The management system governing the manufacture of this product is ISO 9001:2015 certified.

SAP Literature #

80775237_B 20190703 © Copyright OHAUS Corporation

